

LEVANTE



Lifting body, closing frame Die cast aluminum-alloy UNI EN 46100 and of adequate thickness
structural reinforcement to prevent damage during normal use. The surface protection is ensured by
proceedings against the aggressive and chromate
polyester powder coating surface gray RAL9006, RAL9003 white or sable Noir100.



- Mounting bracket, locking bracket: die-cast aluminum UNI EN 46100 and of adequate thickness
structural reinforcement to prevent damage during normal use.

- System LED: white 4200K Emitter.

- Frontal: The circuit is bound by a screen that includes a primary lens system allow to obtain optimal light distribution according to sector regulations. The screen

Front is made of polymer with high transparency.

- Gaskets: Silicone-aging injection molded, adapted to compensate for expansion due to operation to guarantee the durability.

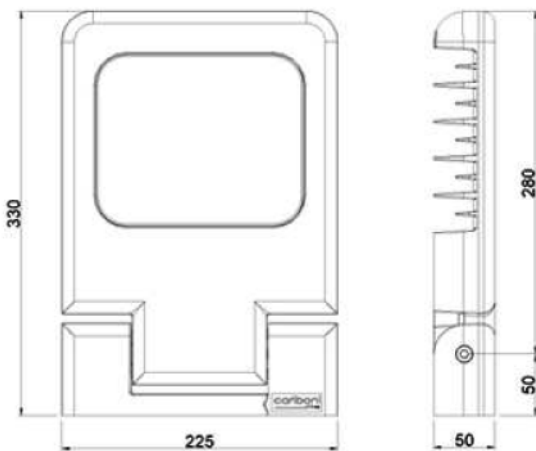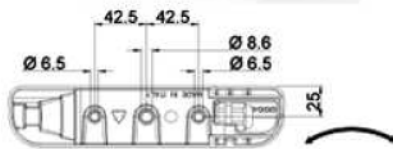

06LV1097A	12 LED	30W	2080 lm	4200k
06LV1097C	12 LED	30W	2080 lm	4200k
06LV1097D	12 LED	30W	2080 lm	4200k
06LV2097A	20 LED	50W	3460 lm	4200k
06LV2097C	20 LED	50W	3460 lm	4200k
06LV2097D	20 LED	50W	3460 lm	4200k



- 06AK952A0 Die cast joint for post-top installation grey
- 06AK952C0 Die cast joint for post-top installation black
- 06AK952D0 Die cast joint for post-top installation white



- 06AK953C0 Stake for ground installation black



- 06AK951C0 Wall Bracket L=55cm black